

**AKSA Power Generation** has been producing industrial generator sets with an innovative compact design and excellence in quality for over 30 years. AKSA has been providing reliable power through three main production plants and over 15 branch offices worldwide.

### General Characteristics

Model Name	APD-ULV350
Engine Make	Volvo
Engine Model	TAD1352GE
Alternator Make	Stamford
Control Panel Make & Model	DSE 7320
Frequency & Speed	60Hz, 1800rpm
Enclosure Make & Model	AKSA AUL 71/72



### Genset Rating

Engine	Alternator	Voltage	Standby Power	Power Factor	Standby Current
TAD1352GE	HCI444E (Wnd-311)	480 / 277V	350kW	0.8	526A
	HCI444E (Wnd-311)	240 / 120V	350kW	0.8	1053A
	HCI444E (Wnd-311)	208 / 120V	350kW	0.8	1215A
	HCI444E (Wnd-17)	600 / 347V	350kW	0.8	421A

#### \*EPA – Certified for Emergency Stationary Applications

Stand-by Power (Maximum): Power available at variable load in the event of main power network failure. No over load is permitted.  
 Prime Power: Power available at variable load in lieu of a main power network. Overload of 10% is permitted for 1 hour in every 12 hours of operation.

The above ratings represent the engine performance capabilities to conditions specified in accordance with ISO 8528/5 & ISO3046.

**Derating may be required for conditions outside of the test conditions.**

### Codes & Standards

The Generator set is designed and manufactured in a facility certified to **ISO9001** standards.

The Generator set is designed and manufactured in a facility certified to **ISO14001:2015** standards.

**AKSA Power Generation** provides **single source responsibility** for the generator set & accessories.

The generator set, with its components, are **prototype tested** and **production tested** according to the UL test program.

The generator set meets **NFPA70, 99, 110, 37** Level 1 when equipped with the necessary accessories and installed per NFPA standards.



\*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.



### Engine Data

Manufacturer	Volvo Penta
Model	TAD1352GE
Displacement & Cylinders	12.78 L / 6 Cylinders
Engine Speed	1800rpm
Engine Standby Power w/Fan	376 Kw
Engine Prime Power w/Fan	344 kW
Aspiration	Turbocharged
Compression Ratio	18.1 : 1
Bore / Stroke	131 mm / 158 mm
Effective Mean Pressure, Standby Power	2.1 Mpa
Max Combustion Pressure, Standby Power	15.8 Mpa
Total Mass Moment of Inertia	3.43 kgm <sup>2</sup>
Friction Power	44 Kw
Wet Weight – Engine Only	2921 lb
Wet Weight – GenPac	3519 lb
Engine Crankcase Vent System	Open

### Fuel System

Injection Pump Type	Delphi / E3.18
System Supply Flow	116 L/h
System Return Flow	18 L/h
Max Allowable Inlet Fuel Temp	60 °C

### Fuel Consumption

Standby Power (100%)	26.8 gal/h
Standby Power (75%)	21.0 gal/h
Standby Power (50%)	14.7 gal/h
Standby Power (25%)	8.35 gal/h

### Electric System

Voltage & Type	24V, Insulated from Earth
Alternator Make / Output	Bosch / 80A
Battery Qty, Rating	2 x 80Ah

### Cooling System

Radiator Cooling System Type	Closed Circuit
Fan Power Consumption	19 Kw
Coolant Capacity	6.34 gal
Max Top Tank Temperature	225 °F
Thermostat, Start – Fully Open	180– 198 °F

### Exhaust System

Exhaust Gas Temp	995 °F
Max Allowable Back Pressure	10 kPa
Exhaust Gas Flow	67.7 m <sup>3</sup> /min

### Air Intake System

Air Consumption	26 m <sup>3</sup> /min
Max Intake Air Restriction	5 kPa
Air Filter Type	Single Stage Paper Cartridge

### Lubrication System

Total System Capacity	9.5 gal
Sump Capacity Max / Min	7.9 gal / 5.0 gal
Max Oil Temp	266 °F
Oil Pressure at Rated Speed	54 – 75 PSI
Oil Consumption	0.013 gal/h



### Alternator Data

Manufacturer	Stamford
Standards	BS EN 60034
Control System	PMG
A.V.R.	MX341
Voltage Regulation	± 1 %
Insulation System	Class H
Protection	IP23
Rated Power Factor	0.8
Stator Winding	Double Layer Concentric
Winding Pitch	Two Thirds
Winding Leads	12
Telephone Interference	THF < 2 %
Waveform Distortion	No Load < 1.5 %
Maximum Over speed	2250 rev/min

### Battery Charger & Electrical System Data

Manufacturer	ComAp
Model	InteliCharger
Input Voltage	85V ~ 264V AC
Output Voltage / Current	27.2V Float / 2.5A pk

### Jacket Water Heater Data

Manufacturer	Hotstart
Model	CTM25110-N00
Input Voltage	120V
Power	2500W

### Controller Data

Manufacturer	DSE
Model	7320 MK II

### Controller Features & Benefits

- Microprocessor controlled, UL & NFPA110 Compatible
- License free PC Software (Non-proprietary Software)
- IP65 rating offers increased resistance to water ingress
- Modules can be integrated to building management systems
- Real time clock provides accurate event log
- Four line back-lit LCD text display
- Five key menu navigation, two wire start/stop at Auto mode
- Front panel editing with PIN protection
- Support up to three remote display modules
- Configurable timers and alarms
- Multiple date and timer scheduler
- Integral PLC editor
- 'Protections disabled' feature
- Load switching (load shedding and dummy load outputs)
- Fully configurable via DSE Configuration Suite PC Software
- SCADA monitoring via DSE Configuration Suite PC Software

### Protection

- ✓ Gen. Voltage – under / over
- ✓ Gen. Freq. – under / over
- ✓ Engine Speed – under / over
- ✓ Engine Oil Pressure – low
- ✓ Engine Temp – low / high
- ✓ Battery Voltage – low / high
- ✓ Weak Battery
- ✓ Fail to Start / Stop
- ✓ Charge Alternator Fail
- ✓ Over Current & Load (kW/kVAr)
- ✓ Unbalanced Load
- ✓ Independent Earth Fault
- ✓ Reverse Power
- ✓ Loss of Speed Signal

### Instruments

- ✓ Gen. Voltage (L-L/L-N)
- ✓ Gen. Frequency
- ✓ Engine speed
- ✓ Oil Pressure
- ✓ Water Temperature
- ✓ Battery Voltage
- ✓ Run Time
- ✓ Phase Sequence
- ✓ Power monitoring (kWh/kVAh/kVArh)
- ✓ Power (kWh/kVAh/kVArh)
- ✓ Power Factor
- ✓ Generator Current
- ✓ Generator Load (%)
- ✓ Earth Current




**Enclosure Features**

- ✓ Heavy Duty Steel / Aluminum Structure
- ✓ E-Stop on Enclosure
- ✓ Control Panel Eliminated from Engine Vibrations
- ✓ Standard Sound Attenuation Foam
- ✓ Plastic Covered Corrosion Resistant Locks & Hinges

**Enclosure Features**

- ✓ Internally Mounted Exhaust System with Rain Cap
- ✓ Coolant Fill Cap
- ✓ Removable Base Frame Lifting Hooks
- ✓ Oil & Coolant Drain Ports
- ✓ Easy Access for Maintenance

Open Skid Gen		Level 1 Enclosure		Level 2 Enclosure	
Length	157.5 in	Length	205 in	Length	224.6 in
Width w/o lift hooks	74.8 in	Width w/o lift hooks	77 in	Width w/o lift hooks	77 in
Height	69.6 in	Height	89.9 in	Height	89.9 in
Dry Weight	6700 lb	Dry Weight	11645 lb	Dry Weight	12020 lb
		Sound Pressure @ 7 meters	76 dB(A)	Sound Pressure @ 7 meters	74 dB(A)

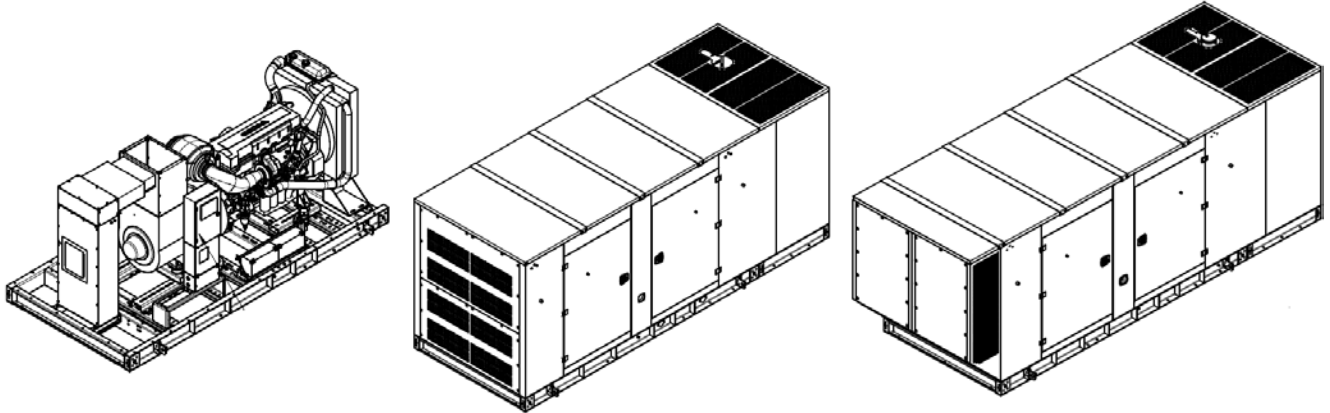

**Fuel Tank - UL142 Listed Base Design**

Size	24hr (665gal)	48hr (1300gal)	72hr (1780gal)
Dimensions (L/W/H) (in)	225 / 74.8 / 15	225 / 74.8 / 26	225 / 74.8 / 35
Weight (lb)	3100	3700	4350

\*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.

**Standard Features & Accessories**

- ✓ UL2200 Certification
- ✓ Heavy Duty Steel Base Frame
- ✓ PMG w/MX341 AVR
- ✓ Engine Jacket Water Heater
- ✓ Battery and Battery Rack
- ✓ Battery Charger
- ✓ Anti Vibration Pads between Engine/Alternator & Base Frame
- ✓ Critical Grade Silencer Inside Enclosure
- ✓ Residential Grade Silencer Set for Open Skid Sets
- ✓ Exhaust outlet rain cap and radiator fill cap
- ✓ Sound Absorb Foam Material for Enclosure
- ✓ Emergency Stop Button
- ✓ Oil Drain Valve
- ✓ Coolant Drain Valve
- ✓ Jacket Water Heater Isolation Valves
- ✓ Flex Fuel Lines
- ✓ Air Filter Restriction Gauge
- ✓ Engine Manifold Cover
- ✓ Turbocharger Cover
- ✓ Protection Covers for Rotating Parts
- ✓ Exhaust Insulation Cover
- ✓ Enclosure DC Light
- ✓ Operations Manual
- ✓ 24 Months / 2000 hours Limited Standby Warranty

**Optional Accessories**

- Main Line CB (3 / 4 Poles – 80% / 100% rated)
- Upsize Alternator
- Voltage Regulation  $\pm 0.5\%$  w/MX321 AVR
- Anti-condensation Heater
- Sub Base Fuel Tank (UL142 / UL2085)
- Fuel Level Display & Alarm on Controller
- Low / High Fuel Alarms
- Fuel Water Separator Filter
- Auto Fuel Fill Control System
- Oil Temperature Display on Controller
- Manual Speed Adjust Rheostat
- Manual Voltage Adjust Rheostat
- Remote Annunciator Panel
- Remote Control & Monitoring Panel
- Advanced SMS Messaging
- Control Panel Heater
- Battery Disconnect Switch
- Battery Heater
- Battery Charger 10/20 Amp
- Shunt Trip / Aux Contacts
- Spring Anti-vibration Isolators
- Automatic Transfer Panel (ATS)
- 5 Years / 2000 hours Limited Comprehensive Warranty

**AKSA POWER GENERATION USA LLC**

371 Exchange Street, West Monroe,  
Louisiana, 71292

Tel: 318.855.8377 Fax: 318.855.8381

E-mail: [sales@aksausa.com](mailto:sales@aksausa.com)

AKSA Power Generation USA is a member of

**KAZANCI HOLDING****DISTRIBUTED BY:**